


TM
TTM
TLM
TMT
TT
TLT



Type gG for cable and line protection
 Type gM for motor protection

Standards: BS88: Part 6; IEC 60269-2

FUSECO PART NUMBER	AMP RATING	VOLTAGE RATING	UTILISATION CATEGORY	BREAKING CAPACITY AT RATED VOLTAGE
TM355	355A	500V	gG	80 kA
TM400	400A	500V	gG	80 kA
TM400M450	400M450A	415V	gM	80 kA
TM400M500	400M500A	415V	gM	80 kA
TTM450	450A	500V	gG	80 kA
TTM500	500A	500V	gG	80 kA
TTM560	560A	500V	gG	80 kA
TTM630	630A	500V	gG	80 kA
TLM670	670A	415V	gG	80 kA
TLM710	710A	415V	gG	80 kA
TLM750	750A	415V	gG	80 kA
TLM800	800A	415V	gG	80 kA
TMT355	355A	415V	gG	80 kA
TMT400	400A	415V	gG	80 kA
TT450	450A	415V	gG	80 kA
TT500	500A	415V	gG	80 kA
TT560	560A	415V	gG	80 kA
TT630	630A	415V	gG	80 kA
TLT670	670A	415V	gG	80 kA
TLT710	710A	415V	gG	80 kA
TLT750	750A	415V	gG	80 kA
TLT800	800A	415V	gG	80 kA

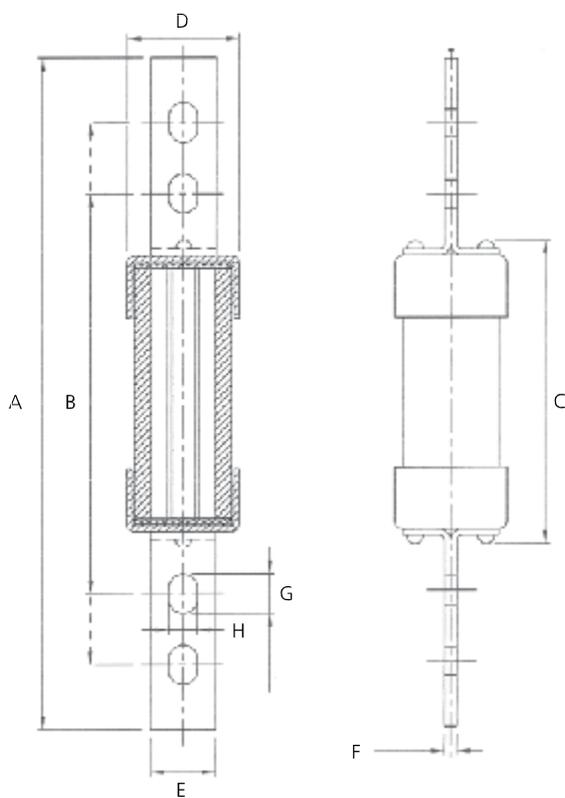

Dimensions

	CATEGORY	BRAND	A	B	C	D	E	F	G	H
			Overall Length	Fixing Centres	Body Length	Body Diameter	Tag Width	Tag Thickness	Hole Length	Hole Width
TM355-400	C1	FuseMaster	210.0	133/184	77.0	50.5	25.4	6.5	12.5	10.3
TM400M	C1	Lawson	210.0	133/184	51.0	61.0	26.0	6.4	16.0	10.3
TTM	C2	FuseMaster	207.0	133/184	71.0	70.0	25.4	6.5	12.5	10.3
TLM	C3	Lawson	210.0	133/184	56.0	73.0	26.0	9.5	16.0	10.3
TMT	-	Lawson	267.0	165/229	52.0	61.0	26.0	6.3	16.0	10.3
TT	-	Lawson	267.0	165/229	54.0	61.0	26.0	7.8	16.0	10.3
TLT670-800	-	Lawson	267.0	165/229	56.0	73.0	26.0	9.5	16.0	10.3