


K-TYPE, T-TYPE & DUAL TYPE EXPULSION FUSELINKS

1/4" UNF-28 TO SUIT ATTACHMENT TO INDUSTRY
STANDARD ARC SHORTENING RODS WHEN REQUIRED

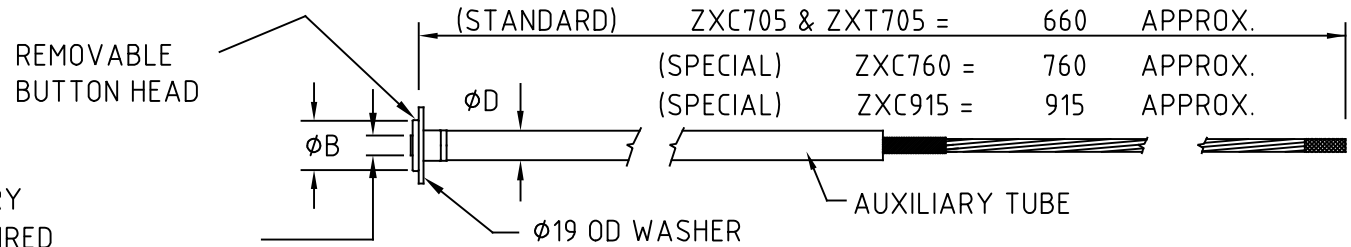



K-TYPE:	AMPS	TYPE K	SPEED CHARACTERISTIC	AUX. TUBE φ D	BUTTON HEAD φ B	φ 19 WASHER
	1	Part No.	ZXC705-01BK37	7.9	12.7	YES
	1.6		ZXC705-1.6BK37	7.9	12.7	YES
	2		ZXC705-02BK37	7.9	12.7	YES
	3		ZXC705-03BK37	7.9	12.7	YES
	5 & 6		ZXC705-06BK37	7.9	12.7	YES
	8		ZXC705-08BK37	7.9	12.7	YES
	10		ZXC705-10BK37	7.9	12.7	YES
	12		ZXC705-12BK37	7.9	12.7	YES
	16		ZXC705-16BK37	7.9	12.7	YES
	20		ZXC705-20BK37	7.9	12.7	YES
	25		ZXC705-25BK37	7.9	12.7	YES
	31		ZXC705-31BK37	7.9	12.7	YES
	40		ZXC705-40BK37	7.9	12.7	YES
	50		ZXC705-50BK37	7.9	12.7	YES
	63		ZXC705-63BK37	10.9	19	NO
	80		ZXC705-80BK37	10.9	19	NO
	100		ZXC705-100BK37	10.9	19	NO

T-TYPE:	AMPS	TYPE T	SPEED CHARACTERISTIC	AUX. TUBE φ D	BUTTON HEAD φ B	φ 19 WASHER
	1	}	SAME AS K SPEED			
	1.6					
	2					
	3					
	5 & 6	Part No.	ZXT705-06BT37	7.9	12.7	YES
	8		ZXT705-08BT37	7.9	12.7	YES
	10		ZXT705-10BT37	7.9	12.7	YES
	12		ZXT705-12BT37	7.9	12.7	YES
	16		ZXT705-16BT37	7.9	12.7	YES
	20		ZXT705-20BT37	7.9	12.7	YES
	25		ZXT705-25BT37	7.9	12.7	YES
	31		ZXT705-31BT37	7.9	12.7	YES
	40		ZXT705-40BT37	7.9	12.7	YES
	50		ZXT705-50BT37	7.9	12.7	YES
	63		ZXT705-63BT37	10.9	19	NO
	80		ZXT705-80BT37	10.9	19	NO
	100		ZXT705-100BT37	10.9	19	NO

DUAL TYPE:	AMPS	DUAL RANGE 'SURGEPROOF'	AUX. TUBE φ D	BUTTON HEAD φ B	φ 19 WASHER
	3/10	('C') ZXC705-310BK37	7.9	12.7	YES
	6/20	('F') ZXC705-620BK37	7.9	12.7	YES
	10/30	('J') ZXC705-1030BK37	7.9	12.7	YES

- For Dual Range 'SURGEPROOF' refer:
 - 3/10 ('C') Dual Range 'SURGEPROOF' instead of standard Fuselink 3K
 - 6/20 ('F') " " " " " 6K
 - 10/30 ('J') " " " " " 10K
- Selection Guide (L567) & Time-Current Data (K "SPEED" = L568, T "SPEED" = L569, SURGEPROOF = L570) available on request.
- Flexible Head Adaptors: Part No. 69231/1 (for 1-31 Amp Fuselinks) or 69231/2 (for 40-100 Amp Fuselinks) must be used with older style Top-Latched Dropout Units.
- For 760 or 915mm length refer ZXC760 or ZXC915 SERIES
- For fuselinks to use in ALM HX0 dropouts refer: type FLEE (12kV), FLFE (24/36kV), FLGE (72.5kV).

This document is the property of NGK STANGER P/L and must not be copied or reproduced without written permission, nor disclosed to any third party.

Quality Endorsed Company ISO 9001:2015	DROPOUT EXPULSION FUSELINKS SERIES		 NGK STANGER NGK STANGER Pty. Ltd. A.B.N. 89 004 225 012 MELBOURNE AUSTRALIA	
	ZXC705, ZXT705, ZXC760, ZXC915		APPD <input checked="" type="checkbox"/>	DATE 17-8-98
	DRAWN <i>S.d.w.</i> PROJECTION 	CHECKED <i>S.d.w.</i> ORIGIN	SIZE A4	DRAWING No. ZXCSALES